




Vista in pianta
plan view

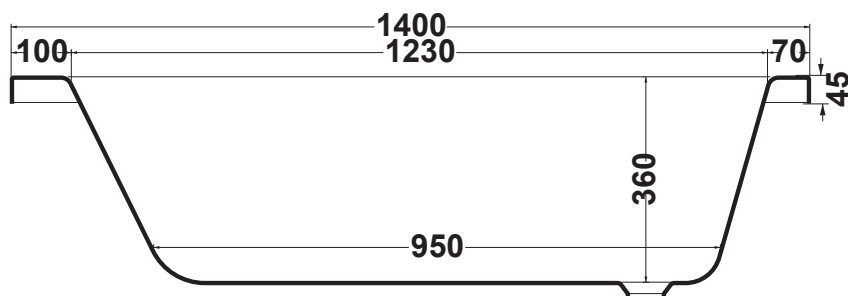

Sezione A/A'
Section A/A'

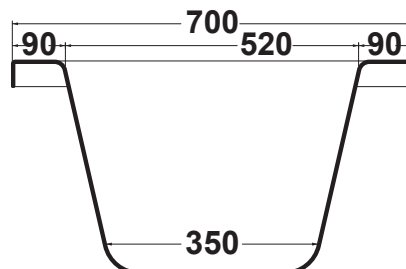

Sezione B/B'
Section B/B'

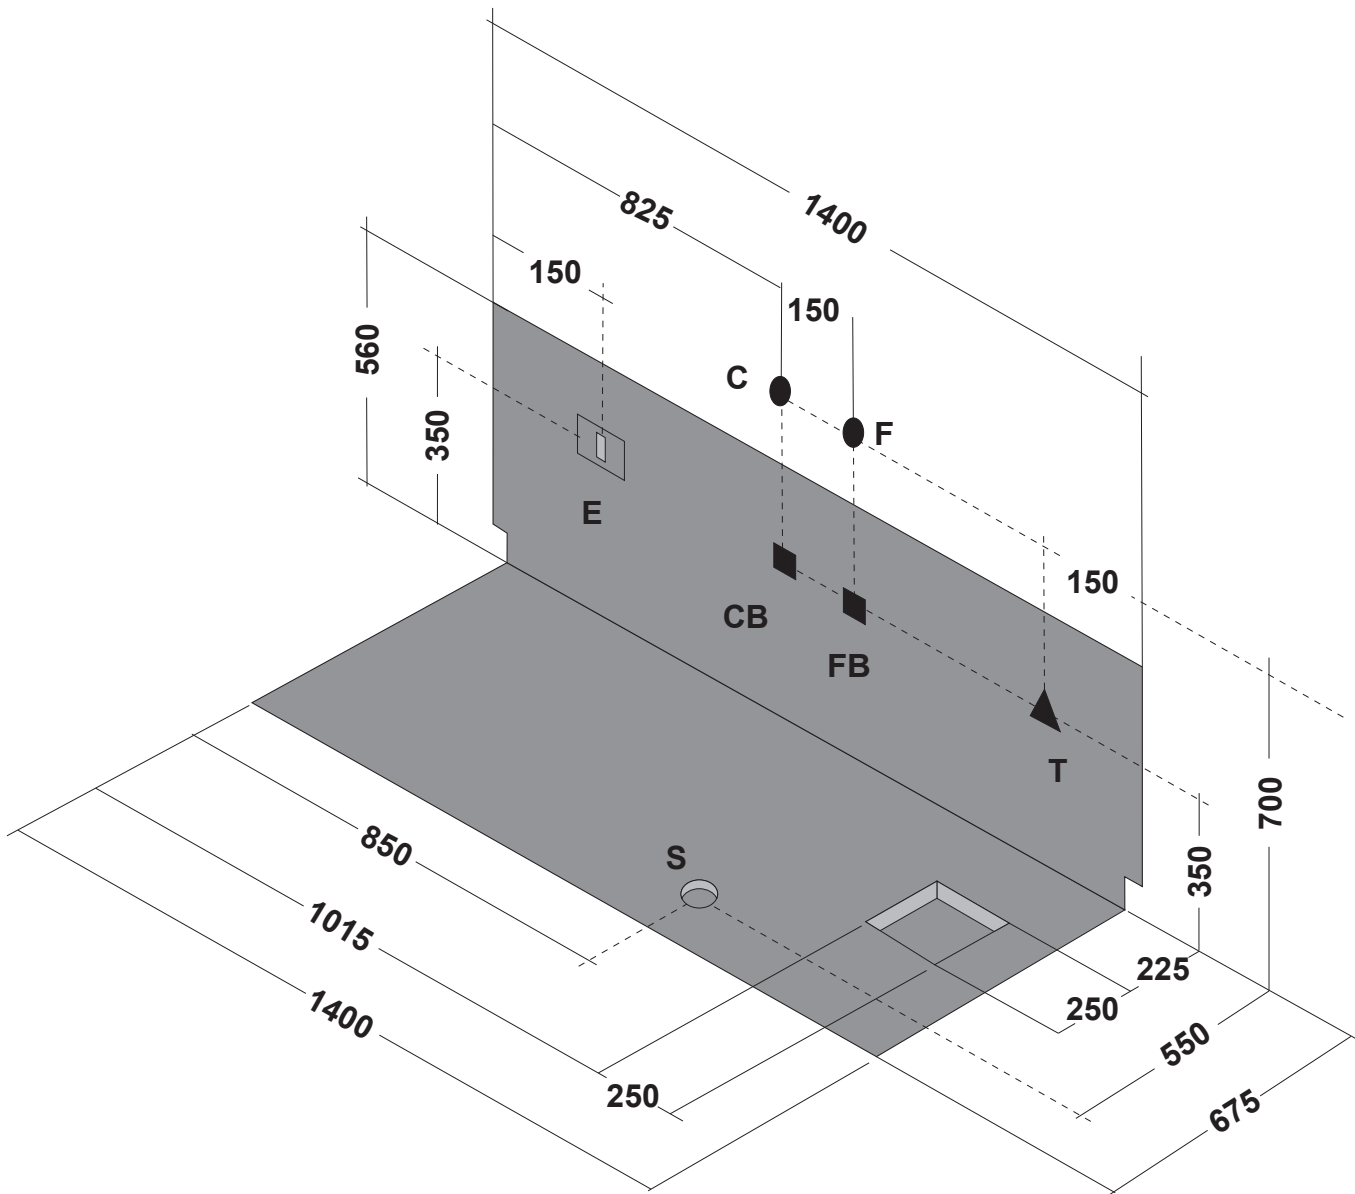

Ingombro vasca proiettato nel muro
 Bath overall dimensions as projected on the wall

VASCA IN ACRILICO DX 140X70

DATI TECNICI

ACRYLIC BATHTUB RX 140X70

TECHNICAL INFO


I	CARATTERISTICHE IDRAULICHE	CARATTERISTICHE ELETTRICHE	REQUISITI DI PREINSTALLAZIONE	COMBINAZIONI RUBINETTERIA
<p>N.B. L'INSTALLAZIONE DEVE AVVENIRE A PAVIMENTO E PARETI FINITE</p>	<p>Numero jets: 5</p>	<p>V 220/240</p>	<p>C : Allaccio acqua calda rubinetteria parete: 1/2"</p>	<p>C F : Rubinetteria parete ● ●</p>
<p>Peso netto: Kg 45</p>		<p>HZ 50/60</p>	<p>F : Allaccio acqua fredda rubinetteria parete: 1/2"</p>	<p>CFT: Rubinetteria parete con erogazione troppopieno ● ● ●</p>
<p>Peso spedizione: Kg 58</p>		<p>KW 0.78</p>	<p>CB : Allaccio acqua calda bordo vasca: 1/2"</p>	<p>CB BF: Rubinetteria bordo vasca ■ ■</p>
<p>Volume spedizione: m3 = 0,777</p>		<p>A 5</p>	<p>FB : Allaccio acqua fredda bordo vasca: 1/2"</p>	<p>T : Allaccio miscelatore per erogazione da troppopieno: 1/2"</p>
<p>Contenuto acqua</p>			<p>S : Allaccio scarico incassato a pavimento: 1-1/2"</p>	
<p>N.B. THE INSTALLATION MUST BE CARRIED OUT WITH FLOOR AND WALLS ALRESDY TILED</p>	<p>Numero jets: 5</p>	<p>V 220/240</p>	<p>C : Wall taps outlet for hot water: 1/2"</p>	<p>C F : Wall taps ● ●</p>
<p>Net weight: Kg 45</p>		<p>HZ 50/60</p>	<p>F : Wall taps outlet for cold water: 1/2"</p>	<p>CFT: Wall taps with water supply by overflowing ● ● ●</p>
<p>total weight with package: Kg 58</p>		<p>KW 0.78</p>	<p>CB : Bath edge taps outlet for hot water: 1/2"</p>	<p>CB BF: Bath edge taps ■ ■</p>
<p>Volume with package: m3 = 0,777</p>		<p>A 5</p>	<p>FB : Bath edge taps outlet for cold water: 1/2"</p>	<p>T : Single outlet for mixed water to supply by overflowing: 1/2"</p>
<p>Water capacity</p>			<p>S : Drainage outlet istalled in the floor: 1-1/2"</p>	
<p>N.B. THE INSTALLATION MUST BE CARRIED OUT WITH FLOOR AND WALLS ALRESDY TILED</p>	<p>Numero jets: 5</p>	<p>V 220/240</p>	<p>C : Wall taps outlet for hot water: 1/2"</p>	<p>C F : Wall taps ● ●</p>
<p>Net weight: Kg 45</p>		<p>HZ 50/60</p>	<p>F : Wall taps outlet for cold water: 1/2"</p>	<p>CFT: Wall taps with water supply by overflowing ● ● ●</p>
<p>total weight with package: Kg 58</p>		<p>KW 0.78</p>	<p>CB : Bath edge taps outlet for hot water: 1/2"</p>	<p>CB BF: Bath edge taps ■ ■</p>
<p>Volume with package: m3 = 0,777</p>		<p>A 5</p>	<p>FB : Bath edge taps outlet for cold water: 1/2"</p>	<p>T : Single outlet for mixed water to supply by overflowing: 1/2"</p>
<p>Water capacity</p>			<p>S : Drainage outlet istalled in the floor: 1-1/2"</p>	
<p>N.B. THE INSTALLATION MUST BE CARRIED OUT WITH FLOOR AND WALLS ALRESDY TILED</p>	<p>Numero jets: 5</p>	<p>V 220/240</p>	<p>C : Wall taps outlet for hot water: 1/2"</p>	<p>C F : Wall taps ● ●</p>
<p>Net weight: Kg 45</p>		<p>HZ 50/60</p>	<p>F : Wall taps outlet for cold water: 1/2"</p>	<p>CFT: Wall taps with water supply by overflowing ● ● ●</p>
<p>total weight with package: Kg 58</p>		<p>KW 0.78</p>	<p>CB : Bath edge taps outlet for hot water: 1/2"</p>	<p>CB BF: Bath edge taps ■ ■</p>
<p>Volume with package: m3 = 0,777</p>		<p>A 5</p>	<p>FB : Bath edge taps outlet for cold water: 1/2"</p>	<p>T : Single outlet for mixed water to supply by overflowing: 1/2"</p>
<p>Water capacity</p>			<p>S : Drainage outlet istalled in the floor: 1-1/2"</p>	

VASCA IN ACRILICO SX 140X70


ACRYLIC BATHTUB LX 140X70

DATI TECNICI


TECHNICAL INFO

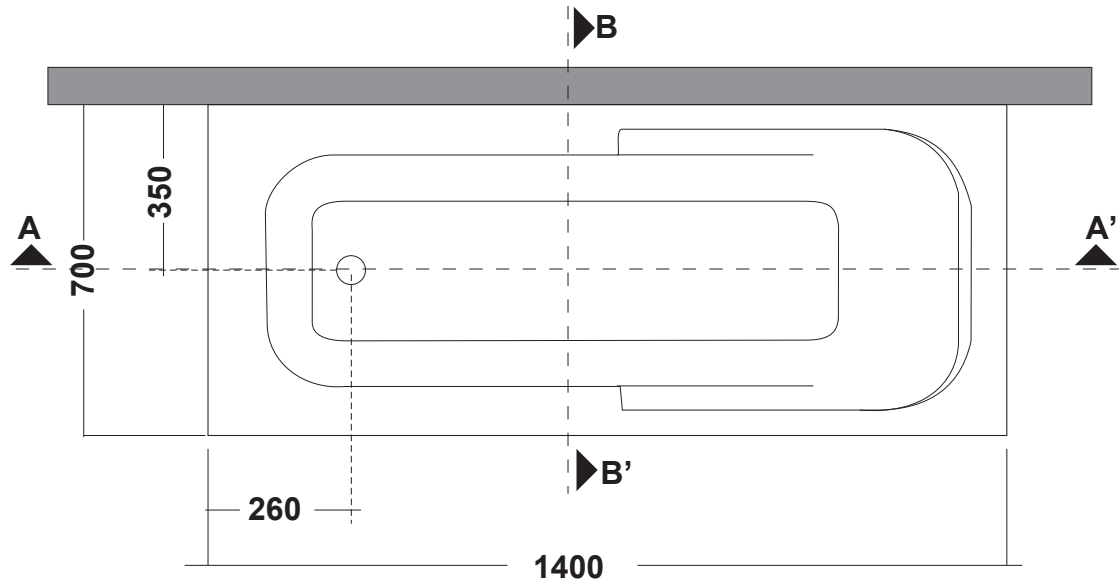

Vista in pianta
plan view

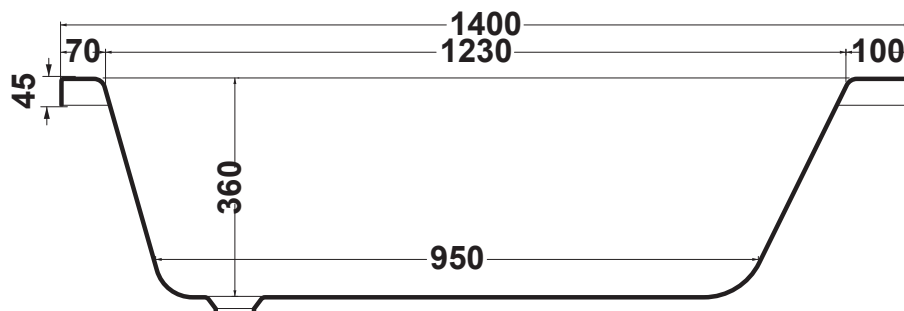

Sezione A/A'
Section A/A'

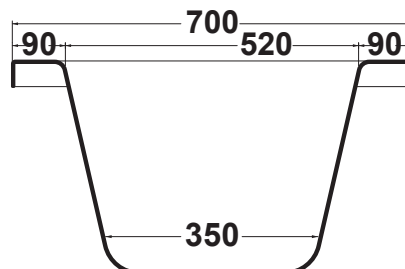

Sezione B/B'
Section B/B'

VASCA IN ACRILICO SX 140X70

DATI TECNICI

ACRYLIC BATHTUB LX 140X70

TECHNICAL INFO

I	CARATTERISTICHE IDRAULICHE	CARATTERISTICHE ELETTRICHE	REQUISITI DI PREINSTALLAZIONE	COMBINAZIONI RUBINETTERIA
<p>N.B. L'INSTALLAZIONE DEVE AVVENIRE A PAVIMENTO E PARETI FINITE</p> <p>Peso netto: Kg 45 Peso spedizione: Kg 58 Volume spedizione: m3 = 0,777 Contenuto acqua: Lt 110</p>	Numero jets: 5	V 220/240	C : Allaccio acqua calda rubinetteria parete: 1/2"	C F : Rubinetteria parete ● ●
		HZ 50/60	F : Allaccio acqua fredda rubinetteria parete: 1/2"	CFT: Rubinetteria parete con erogazione troppopieno ● ● ●
		KW 0.78	CB : Allaccio acqua calda bordo vasca: 1/2"	CB BF: Rubinetteria bordo vasca ■ ■
		A 5	FB : Allaccio acqua fredda bordo vasca: 1/2"	
			T : Allaccio miscelatore per erogazione da troppopieno: 1/2"	
			S : Allaccio scarico incassato a pavimento: 1-1/2"	
			E : Allaccio elettrico idromassaggio IPX5	
GB	WATER SYSTEM SPECIFICATION	POWER SYSTEM SPECIFICATION	CONDITION REQUIRED BEFORE THE INSTALLATION	TAPS COMBINATION
<p>N.B. THE INSTALLATION MUST BE CARRIED OUT WITH FLOOR AND WALLS ALREADY TILED</p> <p>Net weight: Kg 45 total weight with package: Kg 58 Volume with package: m3 = 0,777 Water capacity: Lt 110</p>	Numero jets: 5	V 220/240	C : Wall taps outlet for hot water: 1/2"	C F : Wall taps ● ●
		HZ 50/60	F : Wall taps outlet for cold water: 1/2"	CFT: Wall taps with water supply by overflowing ● ● ●
		KW 0.78	CB : Bath edge taps outlet for hot water: 1/2"	CB BF: Bath edge taps ■ ■
		A 5	FB : Bath edge taps outlet for cold water: 1/2"	
			T : Single outlet for mixed water to supply by overflowing: 1/2"	
			S : Drainage outlet installed in the floor: 1-1/2"	
			E : Power outlet for the whirlpool IPX5	
F	WATER SYSTEM SPECIFICATION	POWER SYSTEM SPECIFICATION	CONDITION REQUIRED BEFORE THE INSTALLATION	TAPS COMBINATION
<p>N.B. THE INSTALLATION MUST BE CARRIED OUT WITH FLOOR AND WALLS ALREADY TILED</p> <p>Net weight: Kg 45 total weight with package: Kg 58 Volume with package: m3 = 0,777 Water capacity: Lt 110</p>	Numero jets: 5	V 220/240	C : Wall taps outlet for hot water: 1/2"	C F : Wall taps ● ●
		HZ 50/60	F : Wall taps outlet for cold water: 1/2"	CFT: Wall taps with water supply by overflowing ● ● ●
		KW 0.78	CB : Bath edge taps outlet for hot water: 1/2"	CB BF: Bath edge taps ■ ■
		A 5	FB : Bath edge taps outlet for cold water: 1/2"	
			T : Single outlet for mixed water to supply by overflowing: 1/2"	
			S : Drainage outlet installed in the floor: 1-1/2"	
			E : Power outlet for the whirlpool IPX5	